


High-Flow-Rate FIBC Dischargers

SBB-HFF

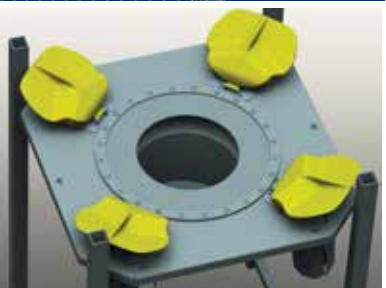

**EASY MATERIAL
DISCHARGE**

**COMPACT &
CONVENIENT**



EASY, CLEAN AND SAFE FIBC EMPTYING

The SBB-HFF-type FIBC Discharger is the ideal stationary solution for efficient FIBC emptying. Its design guarantees safe and handy loading, opening and discharging of FIBCs. The innovative petal-shaped flow aid system allows total or partial discharge of the material from the FIBC ensuring unparalleled efficiency and cost-saving operation even with poorly flowing materials.

The FIBC loading interface is the core of a system designed for easy and safe access when connecting the FIBC outlet valve. This interface enables dust-tight sealing thus avoiding product leaks and contamination.

The SBB-HFF-type FIBC Discharger with loading interface is **essential for a healthy, clean and safe indoor work environment.**

S-TYPE

for loading by forklift-truck




C-TYPE

for loading by crane



M-TYPE


for loading by hoisting gear

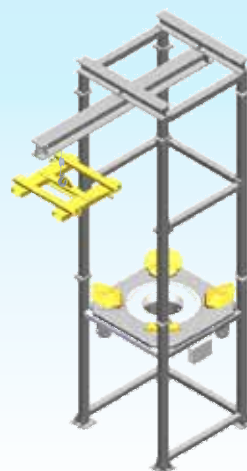

Overall Dimensions

TYPE	OUTLET Ø mm	MAX. HEIGHT mm	WIDTH mm	MAX. FIBC DIMENSIONS mm	MAX. FIBC HEIGHT mm	MAX. FIBC WEIGHT kg
SBB-HFF C	273	1,930	1,410	1,100 x 1,100	unlimited	2,000
SBB-HFF S	273	4,040	1,410	1,100 x 1,100	2,000	
SBB-HFF M	273	5,310	1,580	1,100 x 1,100	2,000	

Benefits



Internal footprint (no protruding parts) allowing optimised battery configuration



No labour required for complete FIBC emptying



Full pre-equipment for subsequent retrofitting of accessories



Easily adaptable to a wide range of bulk materials and different FIBC types, sizes and weights




Large-scale industrial production ensuring an attractively priced high-quality product



Problem-free complete emptying of bag corners even with compressed bulk materials

Technical Features

- Modular design, easily adaptable to different bulk solids, FIBC sizes and weights
- Innovative discharge system tailored for different material characteristics
- Electric motovibrator as additional material discharge aid
- ATEX version available 

Hopper pre-equipped for 4 petal-type flow aids

Pneumatic control panel

Access hatchway for FIBC opening



CE-certified for 2,000 kg (4,410 lb)

Innovative petal-type design pneumatically actuated


273 mm (11 in) diameter outlet

Accessories



PETAL ACTUATOR ELECTRONIC CONTROL PANEL

individually programmable according to specific material properties

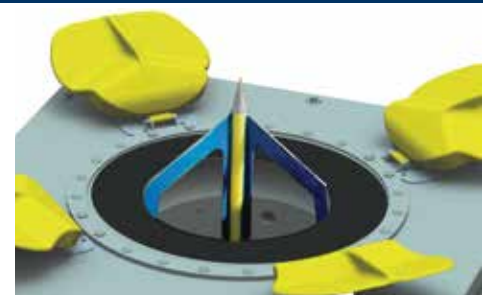

CUTTING KIT

3-blade configuration enhancing cutting performance

Industries



Drymix Processing



Chemicals



Paint and Varnish Processing



Foundries



Glass Processing


Application



MECHANICAL FEEDING & CONVEYING



PNEUMATIC CONVEYING

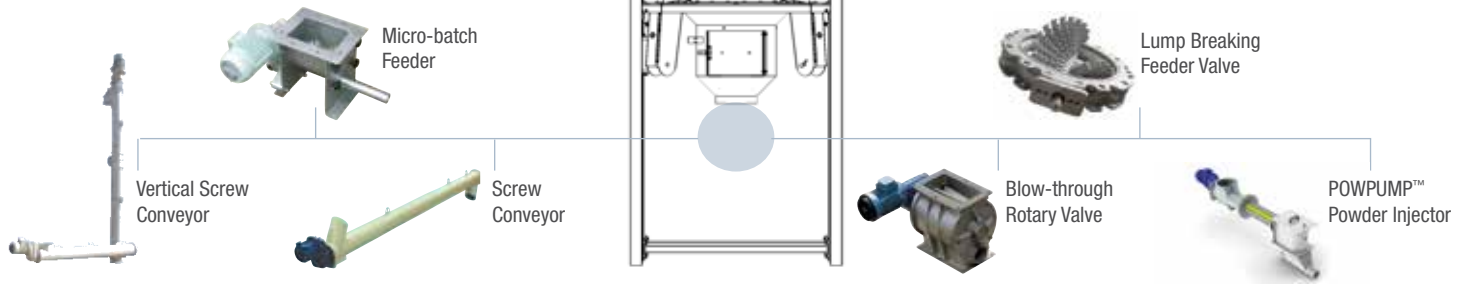

WAM



TOREX



MAP



EXTRAC



WAM AIR



WAM VALVES



SILOFAB



SAVECO

203001809 January 2025 Rights reserved to modify technical specifications.

This brochure has been edited for distribution in European Union countries.



www.wamgroup.com